

6X6 - 5 FT STAND ECONOMY BLIND




SCAN FOR
INSTRUCTIONS

800-763-7320
RANCHKINGBLINDS.COM

KIT BAG CONTENTS

20 - 1 $\frac{1}{4}$ " x $\frac{3}{8}$ " BOLTS
2 - 2 $\frac{1}{2}$ " x $\frac{3}{8}$ " BOLTS
22 - $\frac{3}{8}$ " LOCK NUTS
4 - $\frac{3}{8}$ " WASHERS
8 - $\frac{3}{4}$ " SELF-TAPPING SCREWS
8 - 1 $\frac{1}{4}$ " SELF-TAPPING SCREWS
4 - LADDER END CAPS

6X6 - 5 FT STAND ECONOMY BLIND

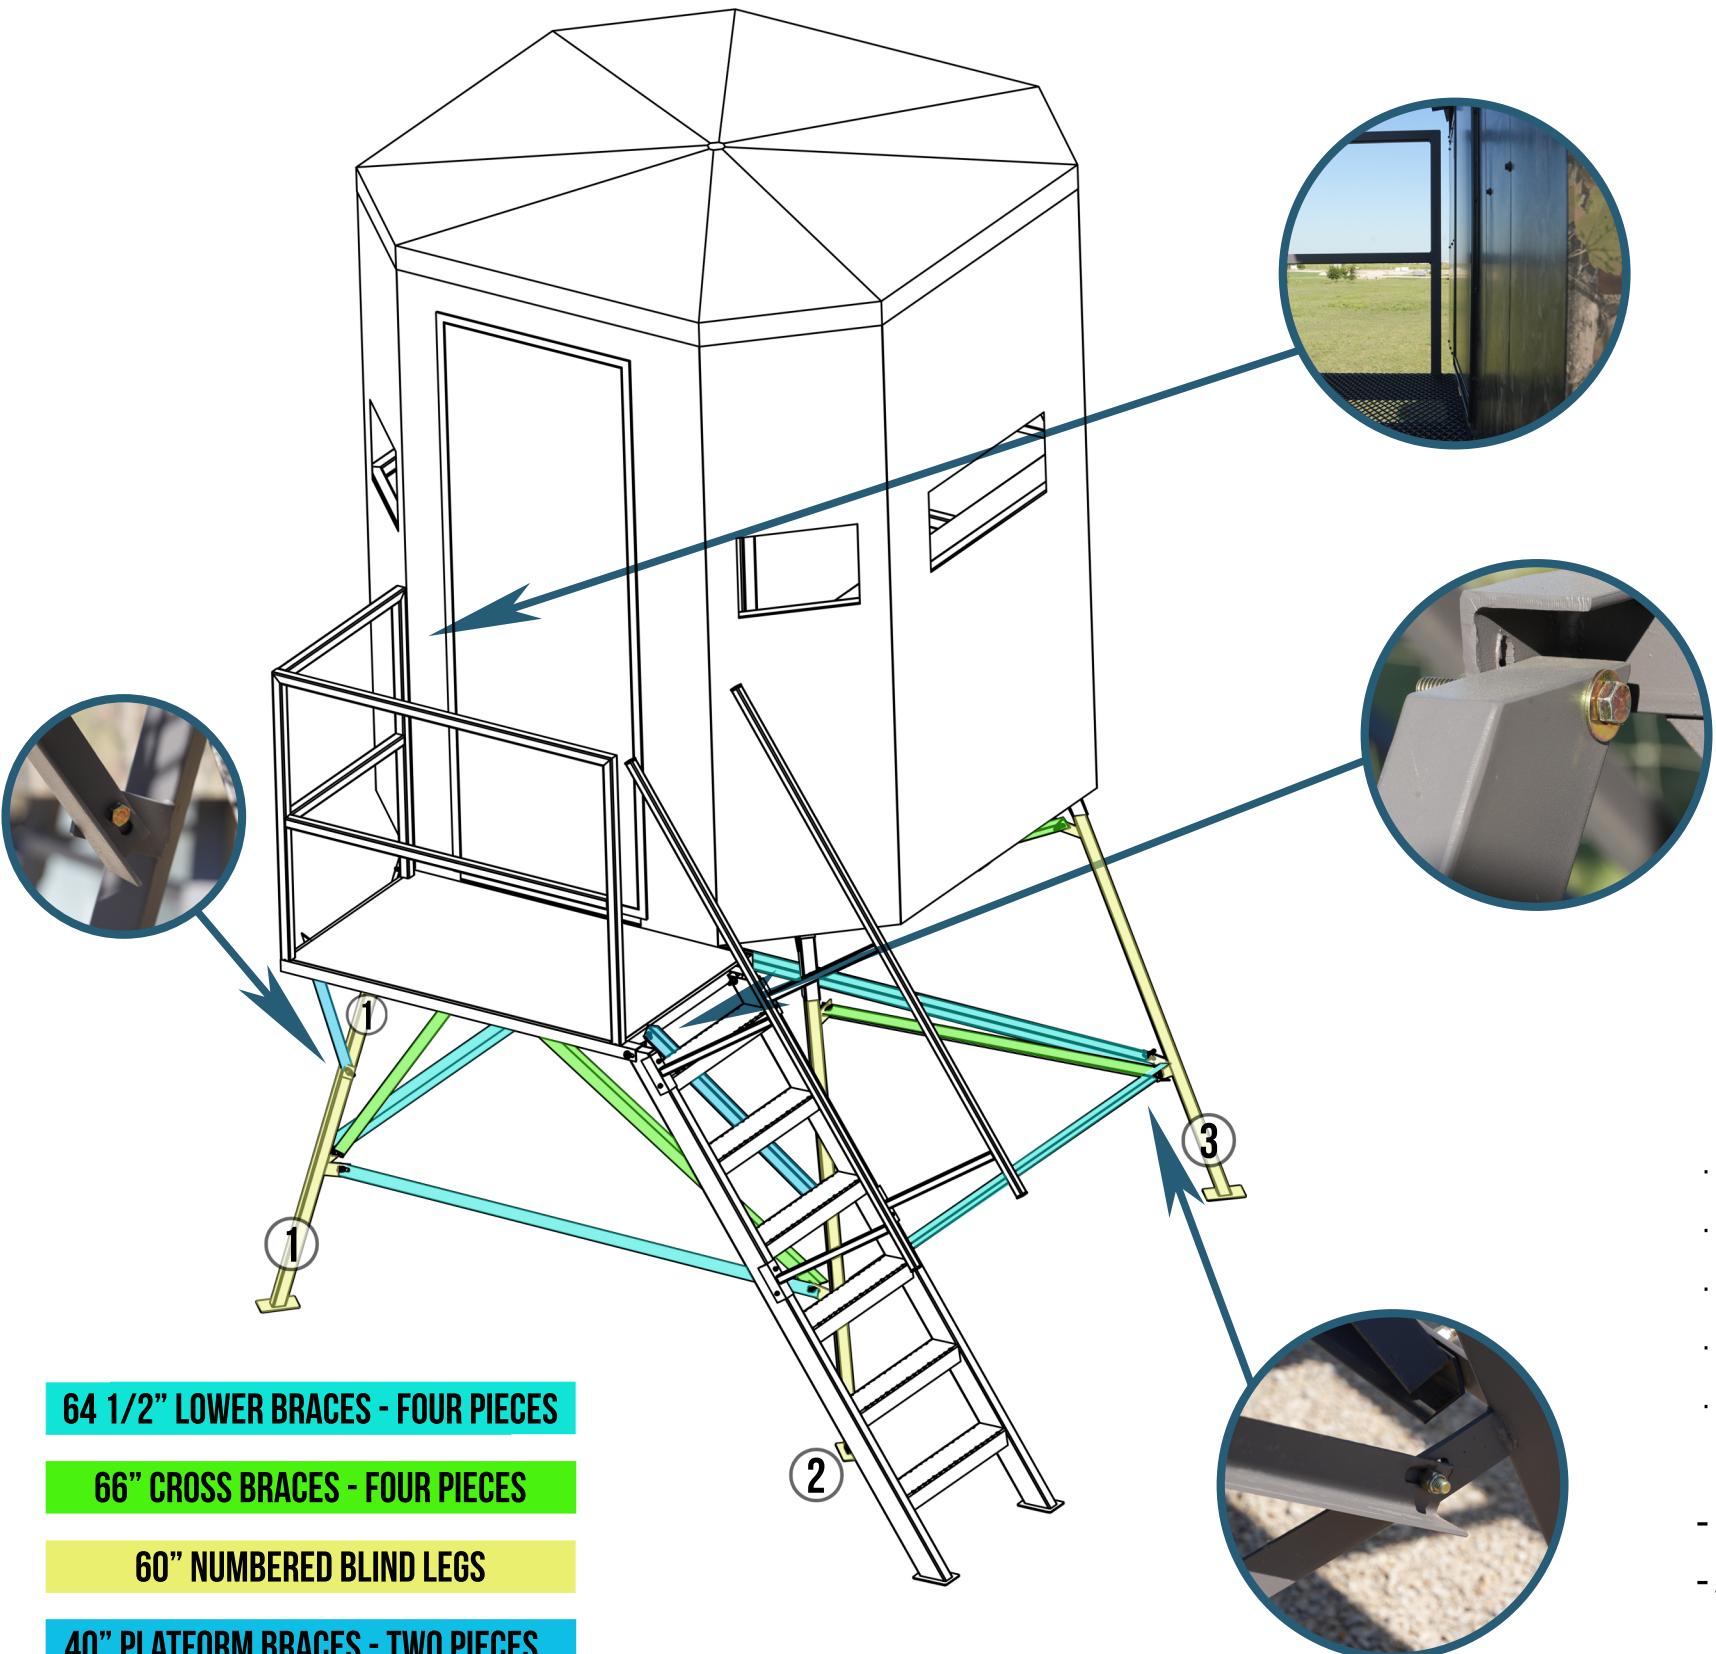

64 1/2" LOWER BRACES - FOUR PIECES

66" CROSS BRACES - FOUR PIECES

60" NUMBERED BLIND LEGS

40" PLATFORM BRACES - TWO PIECES

Raise blind and slide in legs, make sure legs are in all the way, tighten T-Handle

- Lower to 2" off the ground
- Install all braces, leave 3/8 bolts and lock nuts loose at this time
- Set blind on a level surface, pull out all legs to settle the blind into it's final position
- Tighten all bolts
- Raise platform and install five 3/8" bolts, level platform by setting equal gap between vertical railing and the blind.
- Install 40" braces from Leg One and Leg Two to platform using 3/8 bolts and lock nuts
- Attached ladder to platform using 2 1/2" x 3/8 bolts. Be sure to install bolt threads towards the outside, then keeps bolts from creating a tripping hazard.
- Install left and right ladder hand rails with 3/4" self-tapping screws
- Push in plastic ladder end caps on each end of the ladder rails



LEGS ARE MARKED AND INSTALLED WITH THE LEG NUMBER ON THE LEG AND BASE